IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
BEFORE THE BOARD OF PATENT APPEALS AND INTERFERENCES

In re Patent Application of

JONES et al.   Atty. Ref.: 36-1450

Serial No. 09/831,274   TC/A.U.: 2151

Filed: May 9, 2001   Examiner: Tang, K.

For: COMMUNICATIONS NETWORK

<p style="text-align:center">*   *   *   *   *   *   *   *   *   *   *</p>

<p style="text-align:right">Date: April 4, 2008</p>

Mail Stop Appeal Brief - Patents
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

APPEAL BRIEF

Sir:

Appellant hereby **appeals** to the Board of Patent Appeals and Interferences

from the last decision of the Examiner.

TABLE OF CONTENTS

REAL PARTY IN INTEREST

The real party in interest is British Telecommunications public limited

company, a corporation of the country of England.

RELATED APPEALS AND INTERFERENCES

The appellant, the undersigned, and the assignee are not aware of any related appeals, interferences, or judicial proceedings (past or present), which will directly affect or be directly affected by or have a bearing on the Board's decision in this appeal.

STATUS OF CLAIMS

Claims 14, 16-21 and 23-34 are pending. Claims 14, 16-21 and 23-34 have been rejected. The rejections of claims 14, 16-21 and 23-34 are being appealed. Claims 1-13, 15 and 22 have been canceled. No claims have been substantively allowed.

STATUS OF AMENDMENTS

An After Final Response (having no claim or specification amendments)

was filed on December 3, 2008. No amendments have been filed since the date of

the Final Rejection.

SUMMARY OF CLAIMED SUBJECT MATTER

A listing of each independent claim, each dependent claim argued

separately and each claim having means plus function language is provided below

including exemplary, but not limiting, reference(s) to reference numerals, figure(s)

and page and line number(s) of the specification.

14.   A method for operating a network circuit (Fig. 1; pg. 3, l. 18 - pg. 4,

l. 9) using a uniform resource locator (URL), the uniform resource locator

comprising a circuit-switched identifier part identifying a resource as being

accessible via a circuit-switched network (pg. 2, ll. 10-13 and 24-25; pg. 4, ll. 17-

23; pg. 5, ll. 1-3; and pg. 13, ll. 32-33), an address part comprising the address of

the resource (pg. 5, ll. 11-22; pg. 13, ll. 3-7), and a service parameter part (pg. 2,

ll. 15-18; pg. 5, l. 26 – pg. 11, l. 34), wherein it is the circuit-switched identifier

part which identifies the specific type of circuit switched network via which the

resource is accessible (pg. 2, ll. 10-13 and 24-25; pg. 4, ll. 17-23; pg. 5, ll. 1-3; and

pg. 13, ll. 32-33), the service parameter part determines parameters of a

connection in the specific type of circuit switched network identified by the

circuit-switched identifier part to the resource (pg. 2, ll. 15-18; pg. 5, l. 26 – pg.

11, l. 34), and the uniform resource locator has the format:

<circuit-switched identifier part>://<service parameter part>*<address

part> where * is a predetermined separator character (pg. 5, ll. 1-15; pg. 12, ll. 1-

5).

16.   A method as in claim 14 in which the identifier part identifies the

resource as being accessible via an ATM network (1 in Fig. 1).

17.   A method as in claim 16 in which the service parameter part

includes ATM service parameters (pg. 5, l. 26 – pg. 11, l. 34; pg. 12, l. 7 – pg. 13,

l. 1).

18.   A method as in claim 14 in which the service parameter part

includes an identifier for a connection topology (pg. 6, l. 28 – pg. 7, l. 19; pg. 12, l.

10).

19.   A method as in claim 14 in which the service parameter part

includes a parameter indicating a connection bandwidth (pg. 9, ll. 8-19; pg. 12, ll.

15-27).

20.   A machine-readable carrier tangibly carrying machine (Fig. 1)

executable instructions and a URL for operating a network circuit (Fig. 1; pg. 3, l.

18 – pg. 4, l. 9) using the URL, the URL comprising a circuit-switched identifier

part identifying a resource as being accessible via a circuit-switched network (pg.

2, ll. 10-13 and 24-25; pg. 4, ll. 17-23; pg. 5, ll. 1-3; and pg. 13, ll. 32-33), an

address part comprising the address of the resource (pg. 5, ll. 11-22; pg. 13, ll. 3-

7), and a service parameter part (pg. 2, ll. 15-18; pg. 5, l. 26 – pg. 11, l. 34),

wherein it is the circuit-switched identifier part which identifies the specific type

of circuit switched network via which the resource is accessible (pg. 2, ll. 10-13

and 24-25; pg. 4, ll. 17-23; pg. 5, ll. 1-3; and pg. 13, ll. 32-33), the service

parameter part determines parameters of a connection in the specific type of circuit

switched network identified by the circuit-switched identifier part to the resource

(pg. 2, ll. 15-18; pg. 5, l. 26 – pg. 11, l. 34), and the uniform resource locator has

the format:

<circuit-switched identifier part>://<service parameter part>*<address

part> where * is a predetermined separator character (pg. 5, ll. 1-15; pg. 12, ll. 1-

5).

21.   A Uniform Resource Locator product with a uniform resource

locator (URL), the uniform resource locator comprising a circuit-switched

identifier part identifying a resource as being accessible via a circuit-switched

network (pg. 2, ll. 10-13 and 24-25; pg. 4, ll. 17-23; pg. 5, ll. 1-3; and pg. 13, ll.

32-33), an address part comprising the address of the resource (pg. 5, ll. 11-22; pg.

13, ll. 3-7), and a service parameter part (pg. 2, ll. 15-18; pg. 5, l. 26 – pg. 11, l.

34), wherein it is the circuit-switched identifier part which identifies the specific

type of circuit switched network via which the resource is accessible (pg. 2, ll. 10-13 and 24-25; pg. 4, ll. 17-23; pg. 5, ll. 1-3; and pg. 13, ll. 32-33), the service parameter part determines parameters of a connection in the specific type of circuit switched network identified by the circuit-switched identifier part to the resource (pg. 2, ll. 15-18; pg. 5, l. 26 – pg. 11, l. 34), and the uniform resource locator has the format:

<circuit-switched identifier part>://<service parameter part>*<address part> where * is a predetermined separator character (pg. 5, ll. 1-15; pg. 12, ll. 1-5).

23.   A Uniform Resource Locator product according to claim 21, in which the identifier part identifies the resource as being accessible via an ATM network (1 in Fig. 1).

24.   A Uniform Resource Locator product according to claim 23, in which the service parameter part includes ATM service parameters (pg. 5, l. 26 – pg. 11, l. 34; pg. 12, l. 7 – pg. 13, l. 1).

25.   A Uniform Resource Locator product according to claim 21, in which the service parameter part includes an identifier for a connection topology (pg. 6, l. 28 – pg. 7, l. 19; pg. 12, l. 10).

26.   A Uniform Resource Locator product according to claim 21, in which the service parameter part includes a parameter indicating a connection bandwidth (pg. 9, ll. 8-19; pg. 12, ll. 15-27).

27.   A machine-readable carrier tangibly carrying machine executable instructions and a Uniform Resource Locator product with a Uniform Resource Locator (URL) comprising a circuit-switched identifier part identifying a resource as being accessible via a circuit-switched network (pg. 2, ll. 10-13 and 24-25; pg. 4, ll. 17-23; pg. 5, ll. 1-3; and pg. 13, ll. 32-33), an address part comprising the address of the resource (pg. 5, ll. 11-22; pg. 13, ll. 3-7), and a service parameter part (pg. 2, ll. 15-18; pg. 5, l. 26 – pg. 11, l. 34), wherein it is the circuit-switched identifier part which identifies the specific type of circuit switched network via which the resource is accessible (pg. 2, ll. 10-13 and 24-25; pg. 4, ll. 17-23; pg. 5, ll. 1-3; and pg. 13, ll. 32-33), the service parameter part determines parameters of a connection in the specific type of circuit switched network identified by the circuit-switched identifier part to the resource (pg. 2, ll. 15-18; pg. 5, l. 26 – pg. 11, l. 34), and the uniform resource locator has the format:

<circuit-switched identifier part>://<service parameter part>*<address part> where * is a predetermined separator character (pg. 5, ll. 1-15; pg. 12, ll. 1-5).

28.   A method of operating a terminal (Fig. 1) connected directly or

indirectly to a circuit-switched network (Fig. 1; pg. 3, l. 18 – pg. 4, l. 9), the

method comprising:

a)   reading a uniform resource locator (URL), the URL comprising a

circuit-switched identifier part identifying a resource as being accessible via a

circuit-switched network (pg. 2, ll. 10-13 and 24-25; pg. 4, ll. 17-23; pg. 5, ll. 1-3;

and pg. 13, ll. 32-33), an address part comprising the address of the resource (pg.

5, ll. 11-22; pg. 13, ll. 3-7), and a service parameter part (pg. 2, ll. 15-18; pg. 5, l.

26 – pg. 11, l. 34), wherein it is the circuit-switched identifier part which identifies

the specific type of circuit switched network via which the resource is accessible

(pg. 2, ll. 10-13 and 24-25; pg. 4, ll. 17-23; pg. 5, ll. 1-3; and pg. 13, ll. 32-33) and

the uniform resource locator has the format: <circuit-switched identifier

part>://<service parameter part>*<address part> where * is a predetermined

separator character (pg. 5, ll. 1-15; pg. 12, ll. 1-5); and

b)   subsequently establishing a connection, in the specific type of circuit

switched network identified by the circuit-switched identifier part, between the

customer terminal and the resource, the connection having properties determined

at least in part by one or more parameters contained in the service parameter part

(pg. 2, ll. 27-29; pg. 15, ll. 6-7; pg. 16, ll. 16-21).

29.   A method according to claim 28, including reading the uniform

resource locator from a server remote from the terminal (pg. 2, ll. 30-31).

30.   A method according to claim 28, in which step (b) is initiated by the

terminal (pg. 3, l. 5).

31.   A method according to claim 28 in which the identifier part

identifies the resource as being accessible via an ATM network (1 in Fig. 1), and

the service parameter part contains one or more ATM service parameters (pg. 5, l.

26 – pg. 11, l. 34; pg. 12, l. 7 – pg. 13, l. 1).

32.   A terminal (2 in Fig. 1) for use in a communications network (Fig. 1)

including a circuit-switched network (1 in Fig. 1), the terminal (2 in Fig. 1)

comprising:

a)   a network interface for connection to the communications network

(Fig. 1); and

b)   a processor arranged to carry out the following steps (pg. 3, l. 24-

28):

i)   reading a uniform resource locator (URL), the URL comprising a

circuit-switched identifier part identifying a resource as being available via the

circuit-switched network (pg. 2, ll. 10-13 and 24-25; pg. 4, ll. 17-23; pg. 5, ll. 1-3;

and pg. 13, ll. 32-33), an address part comprising the address of the resource (pg. 5, ll. 11-22; pg. 13, ll. 3-7), and a service parameter part (pg. 2, ll. 15-18; pg. 5, l. 26 – pg. 11, l. 34), wherein it is the circuit-switched identifier part which identifies the specific type of circuit switched network via which the resource is accessible (pg. 2, ll. 10-13 and 24-25; pg. 4, ll. 17-23; pg. 5, ll. 1-3; and pg. 13, ll. 32-33) and the uniform resource locator has the format: <circuit-switched identifier part>://<service parameter part>*<address part> where * is a predetermined separator character (pg. 5, ll. 1-15; pg. 12, ll. 1-5); and

(ii)   subsequently establishing a connection (pg. 2, ll. 27-29; pg. 15, ll. 6-7; pg. 16, ll. 16-21), in the specific type of circuit switched network identified by the circuit-switched identifier part, between the customer terminal and the resource, the connection having properties determined at least in part by one or more parameters contained in the service parameter part (pg. 2, ll. 15-18; pg. 5, l. 26 – pg. 11, l. 34).

33.   A data server (6, 7 in Fig. 1) for use in a communications network including a circuit-switched network (1 in Fig. 1), the data server (6, 7) including a store programmed with a Uniform Resource Locator product according to claim 21.

34.   A terminal (2) according to claim 32 in which the identifier part

identifies the resource as being accessible via an ATM network (1), and the

service parameter part contains one or more ATM service parameters (pg. 5, l. 26

– pg. 11, l. 34; pg. 12, l. 7 – pg. 13, l. 1).

GROUNDS OF REJECTION TO BE REVIEWED ON APPEAL

Whether claims 14, 16, 20-21 and 23, 27-33 are "obvious" under 35 U.S.C. §103 over Bonjour et al ("Internet Applications over native ATM", hereinafter "Bonjour") in view of Lee et al ("Uniform Resource Locators (URL)", hereinafter "Lee"), and further in view of Zhu ("DNS and URL Level Addressing for Public Circuit Switching Network Devices").

Whether claims 17, 24, 31 and 34 are "obvious" under 35 U.S.C. §103 over Bonjour in view of Lee, and further in view of Zhu.

Whether claims 18-19 are "obvious" under 35 U.S.C. §103 over Bonjour in view of Lee, and further in view of Zhu.

Whether claims 25-26 are "obvious" under 35 U.S.C. §103 over Bonjour in view of Lee, and further in view of Zhu.

ARGUMENT

Claims 14, 16-21 and 23-34 are not "obvious" under 35 U.S.C. §103 over

Bonjour in view of Lee et al, and further in view of Zhu.

<u>Independent claims 14, 20-21, 27-28 and 32</u>

In order to establish a *prima facie* case of obviousness, all of the claim

limitations must be taught or suggested by the prior art. The combination of

Bonjour, Lee and Zhu fails to teach or suggest all of the claim limitations. For

example, the combination fails to teach or suggest "the URL comprising a circuit-

switched identifier part identifying a resource as being accessible via a circuit-

switched network, an address part comprising the address of the resource, and a

service parameter part, wherein it is the circuit-switched identifier part which

identifies the specific type of circuit switched network via which the resource is

accessible, the service parameter part determines parameters of a connection in the

specific type of circuit switched network identified by the circuit-switched

identifier part to the resource, and the uniform resource locator has the format:

<circuit-switched identifier part>://<service parameter part>*<address

part> where * is a predetermined separator character," as required by independent

claim 14. Similar comments apply to independent claims 20, 21 and 27. The

combination also fails to teach or suggest "a) reading a uniform resource locator

(URL), the URL comprising a circuit-switched identifier part identifying a

resource as being accessible via a circuit-switched network, an address part

comprising the address of the resource, and a service parameter part, wherein it is the circuit-switched identifier part which identifies the specific type of circuit switched network via which the resource is accessible and the uniform resource locator has the format:

<circuit-switched identifier part>://<service parameter part>*<address part> where * is a predetermined separator character; and b) subsequently establishing a connection, in the specific type of circuit switched network identified by the circuit-switched identifier part, between the customer terminal and the resource, the connection having properties determined at least in part by one or more parameters contained in the service parameter part," as required by independent claim 28. Similar comments apply to independent claim 32.

Appellant notes that the Examiner previously indicated in the Office Action dated September 21, 2006 (see section 13 on page 8) that the uniform resource locator (URL) having the format:

<circuit-switched identifier part>://<service parameter part>*<address part> where * is a predetermined separator character constituted allowable subject matter. However, the latest Office Actions indicate a changed position. For example, the outstanding Final Rejection indicates that this claimed URL format and other claim limitations are "obvious" over the three-way combination of Bonjour, Lee and Zhu. Appellant submits that the Examiner's initial position, namely that the uniform resource locator having the format:

<circuit-switched identifier part>://<service parameter part>*<address

part> where * is a predetermined separator character, along with the other claim

limitations constituted allowable subject matter, is the correct position for at least

the reasons discussed below.

Bonjour was merely cited in the International Search Report of the

international phase of the present application (International application no.

PCT/GB99/03834) as category "A" -- document defining the general state of the

art which is not considered to be of particular relevance. The International

Preliminary Examination Report (IPER) of the international phase of the present

application (International application no. PCT/GB99/03834) specifically identified

Bonjour (as reference D2) and concluded that the claims presented in the

international phase satisfied the requirements for both novelty and inventive step.

With respect to Bonjour, page 4, lines 4-7 of the Final Rejection admits the

following:

> "Bonjour did not expressly disclose the URL comprising a
> circuit-switched identifier part identifying a resource as being
> available via the circuit-switched network, an address part
> comprising the address of the resource, and a service parameter
> part, wherein it is the circuit-switched identifier part which
> identifies the specific type of circuit switched network via
> which the resource is accessible."

Lee and Zhu fail to resolve this admitted deficiency of Bonjour. The

Response to Arguments section (page 2) of the Final Rejection states "It is (*sic*)

been said in the office action date (*sic* –dated) back in 03/20/07 that LEE, for

instance, disclosed the format:

<identifier part>//<service identifier part>*<address part> where *is a

predetermined separator character.... The differences between Lee and the instant

application is that, as indicated before, a circuit switched network is being

implemented and URL is being utilized in the circuit switched network

environment rather than *a conventional packet switched network environment as*

indicated by Lee (emphasis added)."[1] (See bottom of page 2 of the Final

Rejection.) This admission on page 2 of the Final Rejection that Lee discloses a

conventional packet switched network environment **contradicts** the Final

Rejection's later statement on page 4, line 8 *et seq.* that "Lee discloses the URL

comprising, an address part comprising the address of the resource (refer to page

4, section 2.3 and <address part>, page 9), and a service parameter part, *wherein it*

is the circuit-switched identifier part which identifies the specific type of circuit

switched network via which the resource is accessible (<host<a>, refer to page 9)

(emphasis added)."[2]

As apparently admitted by page 2, last paragraph and page 4, lines 17 *et*

seq. of the Final Rejection and as can be seen from a reading of Lee, Lee fails to

disclose operations in a circuit-switched network. The complete URL disclosed in

---

[1] No Office action dated "03/20/07" has been issued as alleged by the Final Rejection. Clarification is therefore respectfully requested.

[2] Page 4, lines 8 *et seq.* of the Final Rejection stating "Lee discloses the URL comprising, an address part comprising the address of the resource (refer to page 4, section 2.3 and <address part>, page 9), and a service parameter part, *wherein it is the circuit-switched identifier part which identifies the specific type of circuit switched network* via which the resource is accessible (<host<a>, refer to page 9) (emphasis added)" also contradicts the statement on page 4, lines 17 *et seq.* of the Final Rejection stating "Both Bonjour and Lee did not expressly disclose the URL comprising a *circuit switch identifier part* (emphasis added)."

page 9 of Lee is "http://<Host<a>>:...." The part <Host<a>> is thus scheme

dependent information of scheme http, a protocol which is suitable for use in

relation to <u>packet-switched networks (as opposed to circuit-switched networks)</u>.

Since Lee does not relate to operations in circuit-switched networks, Lee does not

teach or suggest a <u>circuit-switched</u> identifier part which identifies a specific type

of circuit-switched network via which a resource is accessible, or a <u>service</u>

<u>parameter part</u> that determines parameters of a connection in the specific type of

circuit switched network identified by the circuit-switched identifier part as further

required by claim 14 or "establishing a connection, in the *specific type of circuit*

switched network identified by the circuit-switched identifier part, between the

customer terminal and the resource, the connection having properties determined

at least in part by one or more parameters contained in the <u>service parameter part</u>

(emphasis added)," as required by claim 28.

In addition to the HTTP protocol identified by Lee on page 9, Lee

elsewhere specifically refers to FTP, MAILTO and various other protocols.

However, each of these protocols is specifically designed for, and only suitable for

use in, <u>packet-switched networks</u>. None of the protocols referred to in Lee have

any relevance in relation to <u>circuit-switched networks</u>. Accordingly, Lee fails to

resolve the admitted deficiencies of Bonjour. Lee simply makes no reference to

using URLs to establish connections in a circuit switched network, such as an

ATM network. It therefore follows that Lee makes no reference to a service

parameter part which determines parameters of a connection in a specific type of

circuit switched network.

Moreover, since Lee only discloses the use of packet-switched networks, Lee teaches away from claimed invention requiring a circuit-switched identifier part of a uniform resource locator, the part identifying the specific type of circuit-switched network via which a resource is accessible. Lee does not disclose a URL comprising a circuit-switched identifier part and/or a service parameter part which determines connection parameters in the specific type of *circuit switched network* identified by the circuit-switched identifier part, as alleged on page 4, line 8 *et seq.* of the Final Rejection. The alleged motivation for combining Bonjour and Lee ("utilizing the URL and benefit of internet can adapted by the end user to whom they are already familiar with the internet technology, furthermore, it can take advantages of all the ATM network capabilities (emphasis added)") indicated on page 4, lines 14 *et seq.* of the Final Rejection is clearly based on improper reasoning as Lee teaches away from circuit-switched networks such as ATMs.

The combination of Bonjour, Lee and Zhu therefore fails to comply with any of the necessary "Rationales To Support Rejections Under 35 U.S.C 103" set forth in the Examination Guidelines for Determining Obviousness Under 35 U.S.C. 103 in View of the Supreme Court Decision in *KSR International Co. v. Teleflex Inc.* (See Federal Register Vol. 72, No. 195 dated October 10, 2007 [docket no.: PTO-P-2007-0031]. For example, with respect to rationale A of the Guidelines: Combining prior art elements according to known methods to yield predictable results, this rationale is not satisfied since the Final Rejection has not

only merely used a mosaic of three different documents to reject the independent

claims, but has even needed to combine at least two of the cited references in order

to allege a teaching or suggestion of one specific claim limitation (namely, the

URL having the specific format of <circuit-switched identifier part>://<service

parameter part>*<address part> where * is a predetermined separator character).

None of the individual prior art references alone or in combination teaches or

suggests this feature. Moreover, as noted above, Lee actually teaches away from

the combination proposed by the Final Rejection. Since none of the protocols

referred to in Lee have any relevance to circuit-switch networks, Appellant

submits that one of ordinary skill in the art would not have recognized any result

involving a circuit switched network as being predictable. As another example,

rationale G of the Guidelines: Some teaching, suggestion or motivation in the prior

art that would have lead one of ordinary skill to modify the prior art reference or to

combine prior art reference teachings to arrive at the claimed invention is clearly

not met. For example, Appellant submits that there is no teaching, suggestion or

motivation to combine the three references of Bonjour, Lee and Zhu to teach or

suggest the claimed limitation of a uniform resource locator having the format:

<circuit-switched identifier part>://<service parameter part>*<address part>

where * is a predetermined separator character, as apparently alleged by the Final

Rejection, except from using Appellant's invention as a template through a

hindsight reconstruction of the claims. As noted above, Lee's explicit and

exclusive disclosure of packet-switched networks teaches away from a <u>circuit-</u>

<u>switched</u> identifier part as well as away from a service parameter part which

determines parameters of a connection in a specific type of <u>circuit switched</u>

network.

Zhu merely discloses using URLs for replacing telephone or fax numbers

(e.g., "SIP://4711234.512.1.tel"). It appears that there is no information or part

needed beyond those portions of Zhu's URL for establishing a call between the

internet and telephone network. Accordingly, Zhu's teaching of using URLs for

replacing telephone or fax numbers fails to teach or suggest **service parameter**

parts <u>which determine parameters of a connection in a specific type of circuit</u>

<u>switch network identified by the circuit-switch identifier part</u> to the resource. For

example, "SIP://4711234.512.1.tel" does not teach or suggest service parameter

parts as required by independent claims 14, 20-21, 27-28 and 32, let alone ATM

service parameters as specifically required by dependent claims 17, 24, 31 and 34.

Page 4 of the Final Rejection admits "Bonjour did not expressly disclose

the URL comprising...and a <u>service parameter part</u> (emphasis added)." As

discussed above, Lee's failure to disclose URLs to establish connections in a

circuit switched network means that Lee also fails to disclose the claimed service

parameter part (i.e., a service parameter part which determines parameters of a

connection in a specific type of circuit switched network). Even if combined as

proposed by the Final Rejection, Bonjour/Lee/Zhu combination therefore fails to

teach or suggest service parameter parts which determine parameters of a

connection in a specific type of circuit switch network identified by the circuit-

switch identifier part to the resource. By including in the URL not only address information, but also service parameter(s), example embodiments of the present invention make it possible to set up circuits in a circuit switch network with far greater ease. See page 2, lines 14-18 of the specification. Neither Bonjour, Lee nor Zhu teaches or suggests this feature or appreciates this benefit resulting therefrom.

Dependent claims 18-19 and 25-26

Again, page 4 of the Final Rejection admits that "Bonjour did not expressly disclose the URL comprising...and a service parameter part." Based on this clear and explicit admission, Bonjour cannot possibly disclose or suggest a service parameter part of a URL indicating a connection topology (as required by claims 18 and 25) or a connection bandwidth (as required by claims 19 and 26) as alleged on page 6 of the Final Rejection. That is, since Bonjour admittedly fails to disclose a service parameter part of a URL, Bonjour also fails to disclose a service parameter part of a URL indicating a connection topology or bandwidth. The Final Rejection's admission that Bonjour does not disclose a URL comprising a service parameter part **contradicts** the Final Rejection's later allegation in sections 4-5 (page 6) that Bonjour discloses a service parameter part of the URL indicating a connection topology (claims 18 and 25) or a connection bandwidth (claims 19 and 26).

Sections 4-5 (page 6) of the Final rejection alleges that page 1100, paragraph 3 of Bonjour discloses the limitations of claims 18, 19, 25 and 26.

Appellant disagrees. Page 1100, paragraph 3 of Bonjour discloses the following:

3. The components of the solution

In the following subsections we present the main building blocks involved in our solution. We highlight recent progress made in the field of ATM API and naming service. We describe the various aspects of TCP to ATM mapping (protocol stack, connection management, signaling...). We finally explain how access to existing Internet resources can be provided.

While this portion of Bonjour makes a passing reference to "(protocol stack, connection mapping, signaling...)," this passing reference in Bonjour clearly does not disclose or even suggest a service parameter part of a URL as claimed (e.g., a service parameter part which determines parameters of a connection in the specific type of circuit switched network identified by the circuit-switched identifier part to the resource), let alone a service parameter part of the URL indicating a connection topology (claims 18 and 25) or a connection bandwidth (claims 19 and 26). No other portion of Bonjour teaches or suggests these claimed limitations.

Accordingly, Appellant requests that the rejection of claims 14, 16-21 and 23-34 under 35 U.S.C. § 103 over the three-way combination of Bonjour, Lee and Zhu be reversed.
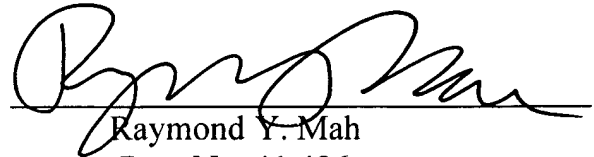
CONCLUSION

In conclusion it is believed that the application is in clear condition for allowance; therefore, early reversal of the Final Rejection and passage of the subject application to issue are earnestly solicited.

Respectfully submitted,

NIXON & VANDERHYE P.C.

By: _____
Raymond Y. Mah
Reg. No. 41,426

RYM:dmw
901 North Glebe Road, 11th Floor
Arlington, VA 22203-1808
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

CLAIMS APPENDIX

1.-13. (canceled)

14.   A method for operating a network circuit using a uniform resource locator (URL), the uniform resource locator comprising a circuit-switched identifier part identifying a resource as being accessible via a circuit-switched network, an address part comprising the address of the resource, and a service parameter part, wherein it is the circuit-switched identifier part which identifies the specific type of circuit switched network via which the resource is accessible, the service parameter part determines parameters of a connection in the specific type of circuit switched network identified by the circuit-switched identifier part to the resource, and the uniform resource locator has the format:

<circuit-switched identifier part>://<service parameter part>*<address part> where * is a predetermined separator character.

15.   (canceled)

16.   A method as in claim 14 in which the identifier part identifies the resource as being accessible via an ATM network.

17.   A method as in claim 16 in which the service parameter part includes ATM service parameters.

18.   A method as in claim 14 in which the service parameter part includes an identifier for a connection topology.

19.   A method as in claim 14 in which the service parameter part includes a parameter indicating a connection bandwidth.

20.   A machine-readable carrier tangibly carrying machine executable instructions and a URL for operating a network circuit using the URL, the URL comprising a circuit-switched identifier part identifying a resource as being accessible via a circuit-switched network, an address part comprising the address of the resource, and a service parameter part, wherein it is the circuit-switched identifier part which identifies the specific type of circuit switched network via which the resource is accessible, the service parameter part determines parameters of a connection in the specific type of circuit switched network identified by the circuit-switched identifier part to the resource, and the uniform resource locator has the format:

<circuit-switched identifier part>://<service parameter part>*<address part> where * is a predetermined separator character.

21.   A Uniform Resource Locator product with a uniform resource

locator (URL), the uniform resource locator comprising a circuit-switched

identifier part identifying a resource as being accessible via a circuit-switched

network, an address part comprising the address of the resource, and a service

parameter part, wherein it is the circuit-switched identifier part which identifies

the specific type of circuit switched network via which the resource is accessible,

the service parameter part determines parameters of a connection in the specific

type of circuit switched network identified by the circuit-switched identifier part to

the resource, and the uniform resource locator has the format:

<circuit-switched identifier part>://<service parameter part>*<address

part> where * is a predetermined separator character.

22.   (canceled).

23.   A Uniform Resource Locator product according to claim 21, in

which the identifier part identifies the resource as being accessible via an ATM

network.

24.   A Uniform Resource Locator product according to claim 23, in

which the service parameter part includes ATM service parameters.

25.   A Uniform Resource Locator product according to claim 21, in which the service parameter part includes an identifier for a connection topology.

26.   A Uniform Resource Locator product according to claim 21, in which the service parameter part includes a parameter indicating a connection bandwidth.

27.   A machine-readable carrier tangibly carrying machine executable instructions and a Uniform Resource Locator product with a Uniform Resource Locator (URL) comprising a circuit-switched identifier part identifying a resource as being accessible via a circuit-switched network, an address part comprising the address of the resource, and a service parameter part, wherein it is the circuit-switched identifier part which identifies the specific type of circuit switched network via which the resource is accessible, the service parameter part determines parameters of a connection in the specific type of circuit switched network identified by the circuit-switched identifier part to the resource, and the uniform resource locator has the format:

<circuit-switched identifier part>://<service parameter part>*<address part> where * is a predetermined separator character.

28.   A method of operating a terminal connected directly or indirectly to a circuit-switched network, the method comprising:

a)   reading a uniform resource locator (URL), the URL comprising a circuit-switched identifier part identifying a resource as being accessible via a circuit-switched network, an address part comprising the address of the resource, and a service parameter part, wherein it is the circuit-switched identifier part which identifies the specific type of circuit switched network via which the resource is accessible and the uniform resource locator has the format: <circuit-switched identifier part>://<service parameter part>*<address part> where * is a predetermined separator character; and

b)   subsequently establishing a connection, in the specific type of circuit switched network identified by the circuit-switched identifier part, between the customer terminal and the resource, the connection having properties determined at least in part by one or more parameters contained in the service parameter part.

29.   A method according to claim 28, including reading the uniform resource locator from a server remote from the terminal.

30.   A method according to claim 28, in which step (b) is initiated by the terminal.

31.   A method according to claim 28 in which the identifier part

identifies the resource as being accessible via an ATM network, and the service

parameter part contains one or more ATM service parameters.

32.   A terminal for use in a communications network including a circuit-

switched network, the terminal comprising:

a)   a network interface for connection to the communications network;

and

b)   a processor arranged to carry out the following steps:

i)   reading a uniform resource locator (URL), the URL comprising a

circuit-switched identifier part identifying a resource as being available via the

circuit-switched network, an address part comprising the address of the resource,

and a service parameter part, wherein it is the circuit-switched identifier part

which identifies the specific type of circuit switched network via which the

resource is accessible and the uniform resource locator has the format: <circuit-

switched identifier part>://<service parameter part>*<address part> where * is a

predetermined separator character; and

(ii)   subsequently establishing a connection, in the specific type of circuit

switched network identified by the circuit-switched identifier part, between the

customer terminal and the resource, the connection having properties determined

at least in part by one or more parameters contained in the service parameter part.

33.   A data server for use in a communications network including a circuit-switched network, the data server including a store programmed with a Uniform Resource Locator product according to claim 21.

34.   A terminal according to claim 32 in which the identifier part identifies the resource as being accessible via an ATM network, and the service parameter part contains one or more ATM service parameters.

EVIDENCE APPENDIX

None

RELATED PROCEEDINGS APPENDIX

None